


Birefringent Filter Plates



Specifications:

- Material Crystal quartz
- Surface Quality 10/5
- Parallelism Less than 1.0 arc second
- Orientation Tolerance ± 5 minutes
- Transmitted Wavefront $\lambda/10$
- Diameter Tolerance $+0.000", -0.005"$
- Clear Aperture Central 90% of diameter

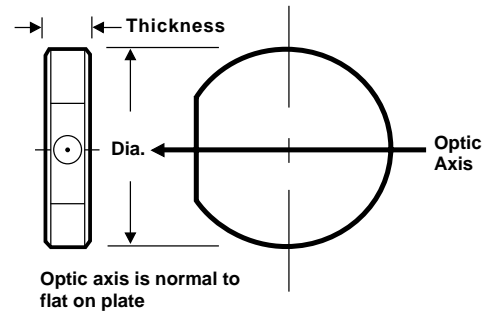

(T= app. 0.5mm)

Diameter	Thickness					
	1T	2T	3T	4T	5T	6T
25.4mm (1.00")	BP10-01	BP10-02	BP10-03	BP10-04	BP10-05	BP10-06
30.0mm (1.18")	BP11-01	BP11-02	BP11-03	BP11-04	BP11-05	BP11-06
38.1mm (1.50")	BP15-01	BP15-02	BP15-03	BP15-04	BP15-05	BP15-06
50.8mm (2.00")	BP20-01	BP20-02	BP20-03	BP20-04	BP20-05	BP20-06

Diameter	Thickness				
	8T	10T	12T	15T	20T
25.4mm (1.00")	BP10-08	BP10-10	BP10-12	BP10-15	BP10-20
30.0mm (1.18")	BP11-08	BP11-10	BP11-12	BP11-15	BP11-20
38.1mm (1.50")	BP15-08	BP15-10	BP15-12	BP15-15	BP15-20
50.8mm (2.00")	BP20-08	BP20-10	BP20-12	BP20-15	BP20-20